

Flexible protective waterproofing cement- based slurry

Description

WP 07 is a two-component highly flexible multi-purpose waterproofing slurry consisting of cement-based powder mortar (component A) and emulsion resin (component B). After hardening, it forms a seamless membrane with the following advantages:

- Crack-bridging ability $\geq 1\text{mm}$
- Total waterproofing against positive hydrostatic pressure up to 2 Atm according to EN 12390-8
- Total waterproofing to negative pressure
- Vapor permeability
- Resistance to aging
- Bonding to wet surfaces without priming
- Perfect bonding to substrates like concrete, masonry, plaster, etc.
- Suitability for potable water tanks as well as food contact surfaces according to the Egyptian code of practice for damp and waterproofing
- Comply with the requirement of the National Organization for potable water
- Protect concrete from carbonation attack
- No corrosive effect on the reinforcing steel in concrete

Certified according to EN 1504-2 and classified as a coating for surface protection of concrete.

Fields of application

It is used for waterproofing concrete, elements, masonry, and plaster surfaces. (In cases ranging from simple moisture to water under pressure) The product is used for both external and internal, against humidity or water under pressure

Suitable for:

- Waterproofing basements
- Water tanks
- Swimming pools
- Sewage tanks
- Balconies, kitchens and bathrooms
- Rooftops

It enables the internal waterproofing of underground areas since it can withstand negative water pressure

Consumption

Depending on the water load, minimum consumption, and relative thickness should be as follows:

Water load	Min. consumption	Min thickness
Moisture	2 Kg/m ²	1.5 mm
Water without pressure	3 Kg/m ²	2 mm
Water under pressure	3.5-4 Kg/m ²	2.5 mm



ISO 9001:2015
CERTIFIED
QUALITY MANAGEMENT SYSTEM
970424A



ISO 14001:2015
CERTIFIED
ENVIRONMENTAL MANAGEMENT SYSTEM
970424B



ISO 45001:2018
CERTIFIED
OCCUPATIONAL HEALTH & SAFETY
MANAGEMENT SYSTEM
970424C



Flexible protective waterproofing cement- based slurry

Technical data

Form: component A cementitious powder
 Component B emulsion resin
 Colors: grey and white Mixing time 3 mints
 Density of dry mortar: 1.7 ± 0.05 Kg/l Density of
 fresh mortar: 1.9 ± 0.10 Kg/l
 Compressive strength
 After 28 days (ASTM C 942): $\geq 30-40$ N/mm² Flexural
 strength
 After 28 days (ASTM C580): $\geq 10-12$ N/mm² Bond
 strength (EN 1042): ≥ 1 N/mm²

Direction for use

Substrate preparation

- The substrate must be clean, free of oil or grease, loose material, dust, etc.
- Any cavities on the concrete surface should be filled and smoothed out with a cement mortar improved with SBR liquid after all loose aggregate has been removed and the surface has been well-dampened.
- Starter bars and wooden molds should be cut to a depth of about 3cm into the concrete and the holes should be sealed.
- Existing construction joints are opened longwise in a V shape to a depth of about 3cm and are subsequently filled as above.
- Corners like wall-floor junctions should be filled and smoothly rounded with a cement mortar, improved with SBR (formation of a Fillet, triangular in cross-section, with 5-6cm sides).
- In the case of masonry walls, joints should be first filled carefully; otherwise, applying a cement mortar layer is recommended first improved with bond SBR.
- For waterproofing basements in old buildings, any existing plaster coat should be removed to a height of at least 50cm above the water level and then proceed as above.
- Wherever flat surface formation is required (smoothing, slope creation, etc.) the use of a mortar improved with bond SBR is recommended.

Application

The whole component A is added to the liquid component B under continuous stirring until a uniform, viscous mixture is formed, suitable for brush application. The substrate should be well dampened but without ponding water. The material is applied in two or more layers, depending on the water load and the consumption required. Layers thicker more than 1 mm should be avoided, because the material may crack. Each new coat is applied after the previous one has dried. The freshly coated surface should be protected from high temperatures, rain, and frost

Packaging

20 Kg paper bags + 5 L emulsion plastic container

12 months from production date
 Stored unopened packaging in dry condition



ISO 9001:2015
 CERTIFIED
 QUALITY MANAGEMENT SYSTEM
 970424A




ISO 14001:2015
 CERTIFIED
 ENVIRONMENTAL MANAGEMENT SYSTEM
 970424B



ISO 45001:2018
 CERTIFIED
 OCCUPATIONAL HEALTH & SAFETY
 MANAGEMENT SYSTEM
 970424C

Flexible protective waterproofing
cement- based slurry

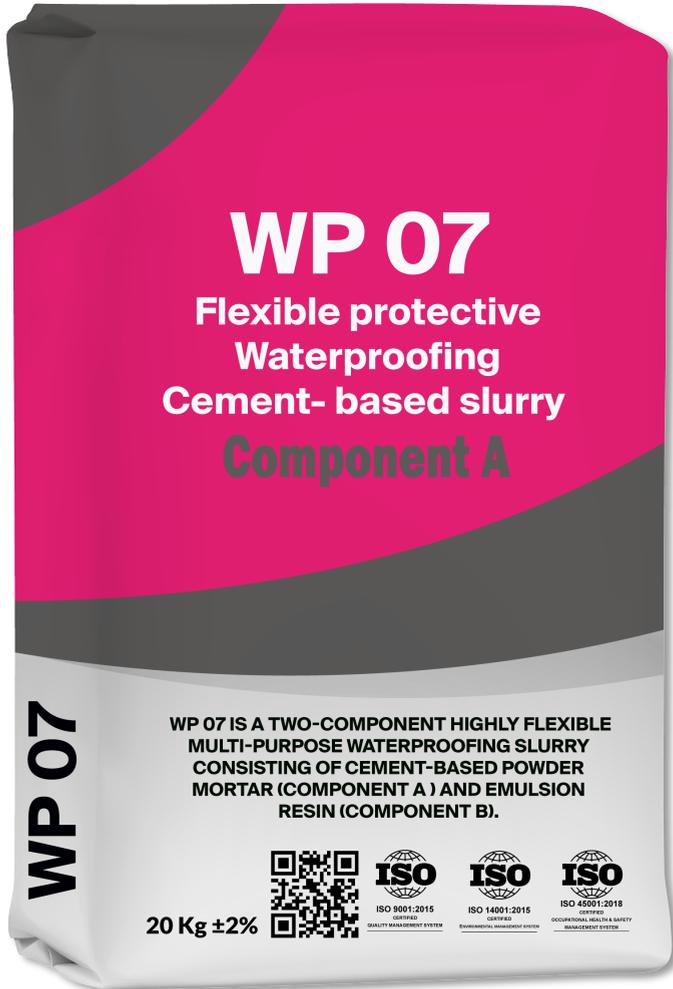

+2033832405 / +2033832406
+201000489094
ashraf@mada-trade.com
<https://www.mada-trade.com>
El-thagr complex, building 2, apartment 105,
el-nozha airport road, DHL building, 5431001.
Alexandria, Egypt.



+357-976 39 600
ashraf@bodovaltd.com
<https://www.bodovaltd.com>
Thiseiou 8, Germasoyia, 4041-
Limassol, Cyprus.

